

Working Pattern (3 different patterns)

Microwave sensor

- In any given lighting condition, the light switches on automatically when presence detected.
- After presence left, light will continuously work within HOLE TIME, then switch off automatically.
- After presence left, any movement detected within HOLD TIME, the light will continuously work for another hold time, then switch off until next movement detected.
- Hold time: Please refer to "HOLD TIME" on product label.

Daylight & Microwave sensor

- With sufficient natural light, when illuminance is more than 10lux, the light does not switch on when presence detected.
- With insufficient natural light:
 - > When illuminance is less than 10lux, the light switches on automatically when presence detected.
 - > With presence detected, light will never switch off, even the nature light is sufficient.
 - > After presence left, any movement detected within HOLD TIME, the light will continuously work for another HOLD TIME, then switch off automatically until next movement detected.
- Hold time: Please refer to "HOLD TIME" on product label.

Adjustable Sensor Setting (DIP Switches on the back of ceiling light)

Detection Area		
1	2	
●	●	25%
●	I	50%
I	●	75%
I	I	100%

Detection area:

Detection area can be reduced by selecting the combination on the DIP switches to fit precisely each application.

Hold Time		
3	4	
●	●	10Min
●	I	3Min
I	●	60S
I	I	20S


Hold time:

Refers to the time period the lamp remains at 100% illumination after no motion detected.

Daylight Sensor		
5	6	
●	●	5Lux
●	I	10Lux
I	●	50Lux
I	I	Disable


Daylight sensor:

The sensor can be set to only allow the lamp to illuminate below a defined ambient brightness threshold. When set to Disable mode, the daylight sensor will switch on the lamp when motion is detected regardless of ambient light level. 50lux: twilight operation, 10lux, 5lux: darkness operation only.

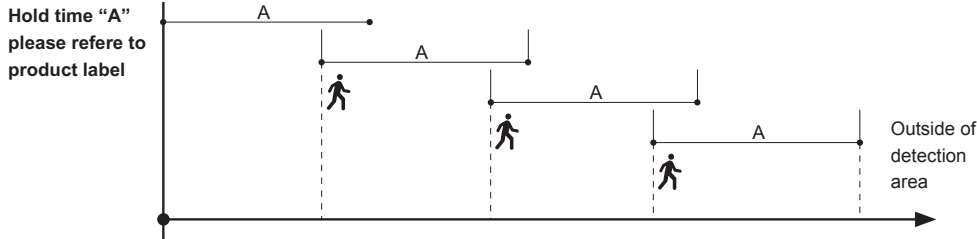

※ Optimum installation height: 3M

LED CEILING LIGHT USER GUIDE

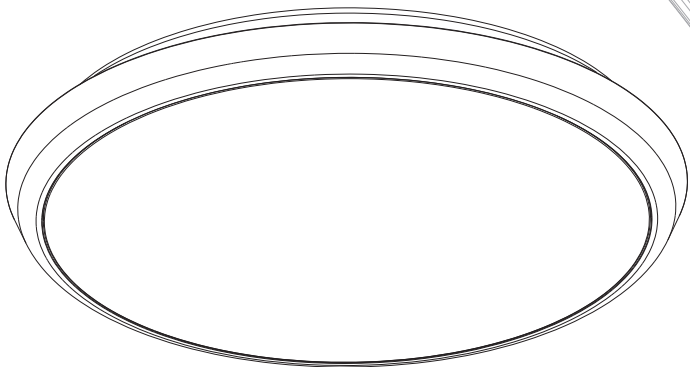

SAFETY INSTRUCTIONS

To ensure correct function and safety, please read and follow all instructions carefully before using the product:

1. Turn off power supply before installation or before doing any maintenance work.
2. Do not install any luminaire near the heat source.
3. IP grade please refer to product label, only IP54 can be used in damp locations.
4. Do not exceed the nominal supply voltage or amperage ratings.
5. Dimmable version could be compatible with a wide range of recommended TRIAC dimmers.
6. All wiring and installation of the light fitting must adhere to local and national wiring rules.
7. Take care not to pull any electrical wires during unpacking as this may damage the connection.
8. Lay out all the components on a smooth surface and make sure there are no components missing before assembling.
9. To avoid injury or damage to the fitting, please ensure that power leads and screws are secure before connecting the power.
10. Please keep instructions for future reference.


For non replaceable light sources:

The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.

Installation Procedure

WARNING


1. Switch off before installation.
2. Switch on only after complete installation and examination of the circuit.
3. Professional electrician for installation and maintenance only.



Turn Off power supply before starting any installation. Read instructions & check you have all the tools & accessories to complete the installation correctly.


Step 1

Take out the light and accessory pack from box.




Step 2

Remove screw, take out bracket.




Step 3

Fix bracket with screws into the ceiling.

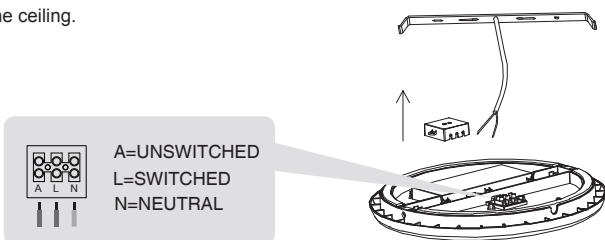


Step 4

For adjustable sensor model, please select the sensor mode before mounting to ceiling or wall, see below picture.




Step 5

Mount ceiling light into the right place

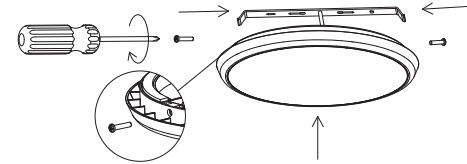

Step 6

Switch on

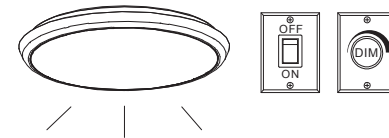

Functions Instruction



Emergency


Emergency function switches automatically between power cut and power restoration.

- Li battery, high efficiency
- Battery duration: 3 hours
- Charge period: 24 hours




Sensor

Detection area: 140 degree wide detective beam angle with 5-7 meters distance.

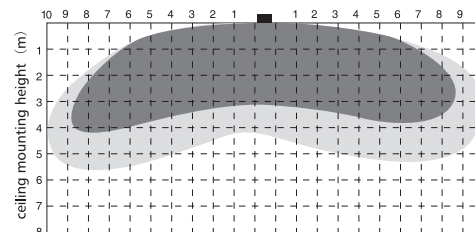

Ceiling Mounting pattern (Unit: m)

High detection area

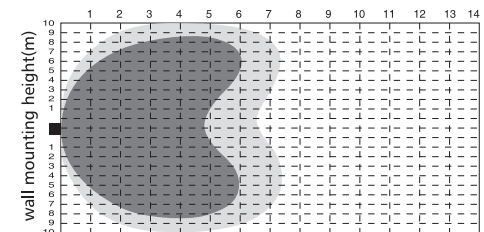

Wall Mounting pattern (Unit: m)

Low detection area